

(12) PATENT		(11) Application No. AU 199732087 B2	
(19) AUSTRALIAN PATENT OFFICE		(10) Patent No. 729443	
(54)	Title Shaped woven tubular soft-tissue prostheses and methods of manufacturing		
(51) ⁶	International Patent Classification(s) A61F 002/06		
(21)	Application No:	199732087	(22) Application Date: 1997.05.20
(87)	WIPO No: WO97/43983		
(30)	Priority Data		
(31)	Number	(32) Date	(33) Country
	08/653028	1996.05.24	US
(43)	Publication Date : 1997.12.09		
(43)	Publication Journal Date : 1998.02.19		
(44)	Accepted Journal Date : 2001.02.01		
(71)	Applicant(s) Boston Scientific Limited		
(72)	Inventor(s) Jose F. Nunez; Peter J. Schmitt		
(74)	Agent/Attorney WATERMARK PATENT and TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN VIC 3122		
(56)	Related Art US 2924250 US 3095017		

BEST AVAILABLE COPY

OPI DATE 09/12/97 APPL. ID 32087/97
AOJP DATE 19/02/98 PCT NUMBER PCT/US97/08602



AU9732087

(51) International Patent Classification 6:
A61F 2/06

(11) International Publication Number: WO 97/43983

(43) International Publication Date: 27 November 1997 (27.11.97)

(21) International Application Number: PCT/US97/08602

(22) International Filing Date: 20 May 1997 (20.05.97)

(30) Priority Data:
08/653,028 24 May 1996 (24.05.96) US

Applicant: **Boston Scientific Limited**
Drive, Oakland, NJ 07436 (US); The Corporate Centre,
8-10 Hill, Gay Street, St. Michael, Barbados, West Indies

(72) Inventors: NUNEZ, Jose, F.; 11 Grove Street, Kearny, NJ
07032 (US); SCHMITT, Peter, J.; 2 Bubenko Drive,
Garnerville, NY 10923 (US).

(74) Agents: SCOLA, Daniel, A., Jr. et al.; Hoffmann & Baron, 350
Jericho Turnpike, Jericho, NY 11753 (US).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ,
PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT,
UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW,
SD, SZ, UG); Eurasian patent (AM, AZ, BY, KG, KZ, MD,
RU, TJ, TM); European patent (AT, BE, CH, DE, DK, ES,
FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE); OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD,
TG).

Published
With international search report.
Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.

(54) Title: SHAPED WOVEN TUBULAR SOFT-TISSUE PROSTHESES AND METHODS OF MANUFACTURING

(57) Abstract

Continuously flat-woven implantable tubular prostheses have seamless woven sections which gradually change the number of warp yarns to smoothly transition, i.e., taper, from one diameter to another. Multi-diameter endoluminal grafts having a variety of shapes and configurations are made using a seamless weaving process without unacceptable voids or gaps in the tubular wall.

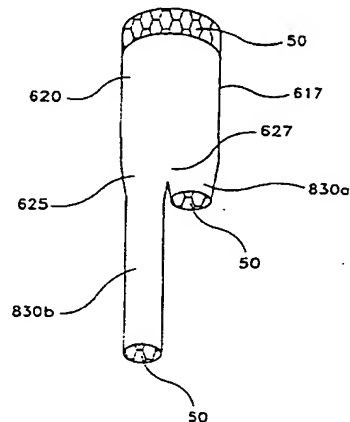

**SHAPED WOVEN TUBULAR SOFT-TISSUE PROSTHESES AND METHODS
OF MANUFACTURING**

FIELD OF THE INVENTION:

5 The present invention relates to shaped seamless woven tubular prostheses and methods of manufacture. In particular, the present invention relates to implantable endoluminal prostheses used in the vascular system.

BACKGROUND OF THE INVENTION:

10 Tubular woven fabrics have been used for soft-tissue implantable prostheses to replace or repair damaged or diseased lumens in the body. In particular, endoprotheses are used in the vascular system to prevent the blood from rupturing a weakened section of the vessel. Such endoluminal conduits are generally affixed in a specified location in the vessel by means of stents, hooks or other mechanisms which serve to secure the device in place. Endoluminal tubular devices or conduits can also be used in other lumens in the body, such as in the esophagus and colon areas.

15 Vascular grafts have been used successfully for many years to replace segments of the diseased vessel by open surgical methods. These techniques, however, required long and expensive procedures which have a high degree of risk associated with them due to the complexity of the surgical procedures. Presently, non-invasive techniques for treating body lumens, such as vessels in the vascular system, have become more prominent because they present less risk to the patient and are less complex than open surgery. Generally, a doctor will make an incision in the femoral artery and introduce an endoluminal device by means of a catheter delivery system to the precise location of the damaged or diseased vessel. The device will generally include a stent and graft combination which is deployed from the delivery system and affixed in place usually
20 by use of a balloon catheter. The balloon catheter is used to expand the stents which are attached to and most often contained within the graft portion. Expansion of the stent serves to both anchor the graft and to maintain the graft and the body lumen in the

open state. In some cases, self-expanding stents or the like are used. Stents made from shaped-memory materials, such as nitinol, are also employed whereby radial expansion or contraction of the stent is designed to occur at specified temperatures.

5 The use of tubular endoluminal prostheses, however, requires a high degree of precision in the diameter of the tube, such that its external diameter matches the internal diameter of the body lumen very closely, thereby conforming to the internal surface of the body lumen. The vessels or lumens in the body, however, often vary in diameter and shape from one length to another, in addition to sometimes defining a tortuous path therebetween. This is particularly true with the vessels in the vascular system. Thus, 10 tubular endoprotheses which are generally straight in configuration cannot accurately conform to all portions of the lumen which have these variations present. Often times, the prosthesis wall will require a bunching or gathering within the lumen of the vessel which presents a long-term potential for thrombosis and generally creates a more turbulent environment for blood flow.

15 More recently, in recognition of certain problems in implanting and delivering endoluminal prostheses, a thinly woven graft has been made which is designed to closely fit the inner lumen of vessels. Such a graft is described in co-assigned and co-pending USSN 08/285,334 filed on August 2, 1994, herein incorporated by reference. The thinness of this graft allows for it to be easily packed into a catheter delivery 20 system and occupy less space within the lumen when deployed. However, these grafts have been made in straight lengths or bifurcated structures using traditional weaving techniques which have specific limitations as to the final shape of the product and, in the case of bifurcated or multi-diameter grafts, the transition from one diameter to another occurs at a single point in the weave, creating a sudden change in the weaving 25 pattern of the fabric. Such sudden changes, as further discussed herein, are considered undesirable.

Weaving is commonly employed to fabricate various tubular shaped products.

For example, implantable tubular prostheses which serve as conduits, such as vascular grafts, esophageal grafts and the like, are commonly manufactured using tubular weaving techniques, wherein the tubular product is woven as a flat tube. In such weaving processes, a variety of yarns are interwoven to create the tubular fabric. For example, a set of warp yarns is used which represents the width of the product being woven, and a fill yarn is woven between the warp yarns. The fill yarn is woven along the length of the warp yarns, with each successive pass of the fill yarn across the warp yarns for each side of the tube representing one machine pick. Thus, two machine picks represent one filling pick in a tubular woven structure, since weaving one fill yarn along the entire circumference of the tube, i.e., one filling pick, requires two picks of the weaving machine. As such, in a conventional woven product, the fill yarn is woven along the length of the warp yarns for a multiple number of machine picks, with the woven product produced defined in length by the number of filling picks of the fill yarn and defined in width by the number of warp yarns in which the fill yarn is woven therebetween. Such terminology and processes are common in the art of textile weaving.

Woven tubular prostheses such as vascular grafts, having tapered diameter sections or tailored shapes such as those shown in the inventive figures discussed herein, have heretofore not been made without requiring manual customization in the form of cutting, splicing and/or tailoring with sutures. Continuous flat-weaving techniques have not been able to make diameter changes in a gradual manner, having a tapered tubular section transitioning from one diameter to another diameter. Instead, diameter changes in the woven product occur instantaneously, creating a sudden split in the warp yarns. Such a sudden split, such as at the crotch section of a bifurcated endoluminal graft, leaves gaps or voids in the weave at the splitting point. Thus, conventional bifurcated woven grafts have required sewing of the crotch section in order to insure a fluid-tight character. Such sewing is labor intensive and is generally done manually, thereby introducing the potential for human error and reliance on the technique of the technician.

Furthermore, the prior art techniques of forming tubular shapes have required manual cutting and suturing of standard woven tubes to the desired size and shape. Continuous weaving of tubular grafts to produce seamless gradual diameter transitions in devices has not been previously known. For example, the change from a first diameter to a second diameter in a single lumen, straight graft, in a continuous weaving process was not attempted due to the aforementioned limitations. Instead, individual grafts of different diameters would be individually woven and sutured together to make a continuous tube. The diameter change required customized cutting to gradually transition from one diameter to another. For example, in the case where a bifurcated graft having a 24 mm aortic section and leg sections with different diameters, e.g. 12 mm and 10 mm, the surgeon would manually cut and tailor one of the legs of a bifurcated graft which was formed having two equal leg sections with the same diameters, and suture a seam along that leg to form a leg of the desired different diameter. This customization required cutting and suturing. Such customization relied heavily on the skill of the physician and resulted in little quality control in the final product. Additionally, such grafts could not always be made in advance for a particular patient, since the requirements for such customization may not be known until the doctor begins the surgery or procedure of introducing the device into the body. Additionally, as previously mentioned, the suture seams take up considerable amounts of space when packed into the delivery capsule or other catheter-like device designed to deploy the endoluminal prostheses.

There is currently no prior art means to satisfy the variation in requirements from patient to patient for proper fit of the endoprosthesis. Prior art continuously woven bifurcated grafts not only suffered from the gap created at the warp yarn split, but they existed only with iliac leg portions having equal diameters. If different diameter iliac leg portions were required, this would again be accomplished through customization. One leg would be manually cut-off and another independently formed leg having a different diameter would be sutured on in its place.

Complex shapes, such as tubular "S" shaped or frustoconical shaped woven sections were not even attempted due to the impracticability, intensive labor and subsequent cost. Such shaped tubes could not practically be woven using prior art techniques.

5 In addition to requiring manual sewing steps, sutures used in prior art customized grafts create seams which are to be avoided in endoluminal prostheses, particularly because of the space which they take up when tightly packed into a catheter delivery system. Furthermore, such seams contribute to irregularities in the surface of the graft and potential weakened areas which are obviously not desirable.

10 Due to the impracticalities of manufacturing tubular grafts and endoprotheses, straight and bifurcated tubular grafts often required customization by doctors using cutting and suturing for proper size and shape.

15 With the present invention, designs are now possible which heretofore have not been realized. Thus, the weaving of gradually shaped tubular grafts in a continuous process to create seamless and void-free conduits for implantation in the body has heretofore not been possible. The present invention provides a process of producing such grafts, as well as providing the weaving structure inherent in products formed therefrom.

SUMMARY OF THE INVENTION:

20 The present invention relates to flat-woven implantable tubular prostheses, and in particular endoluminal grafts, which have been continuously woven to form seamless tubular products having gradual changes in diameter along their length, as well as various shaped tubular sections formed from gradual changes in the number of warp yarns engaged or disengaged with the fill yarns during the weaving process. Changes
25 in diameter and/or shape are accomplished by gradually engaging and/or disengaging selected warp yarns with the fill yarns in the weave pattern. It has been discovered that such a gradual transition can be accomplished using electronic jacquard looms

controlled by computer software. Such engaging and/or disengaging of warp yarns can change the diameter of the tube in a manner which creates a seamless and gradual transition from one diameter to another. Additionally, such engagement and/or disengagement can be used to create tubular vascular prostheses and the like which have any number of shapes as depicted and further described herein.

Thus, in one embodiment of the present invention there is provided, a flat-woven implantable tubular prosthesis having warp yarns and fill yarns including first and second spaced apart portions which define therebetween a transition tubular wall extent, the first portion having a first diameter and the second portion having at least a second diameter different from the first diameter. The tubular prosthesis further includes a weaving pattern along the transition tubular wall extent, said weaving pattern having a gradual change in the number of warp yarns to provide a seamless transition between the first and second portions.

In another embodiment of the present invention there is provided, a flat-woven implantable tubular prosthesis including first and second ends defining a tubular wall therebetween, with the tubular wall including warp yarns and fill yarns. The tubular wall is defined by a first elongate woven section with a first selected number of warp yarns therealong to define a first tubular internal diameter, and a second elongate woven section seamlessly contiguous with the first woven section and having a gradual change in the number of warp yarns therealong to define at least a second tubular internal diameter.

In an alternative embodiment of the present invention, there is provided, a flat-woven tubular implantable prosthesis having warp yarns and fill yarns including first and second ends defining a tubular wall therebetween, with the tubular wall having a first woven extent with a first selected number of warp yarns therealong to define a first tubular internal diameter, a transitional second woven extent contiguous with the first woven section with at least a second selected number of warp yarns therealong to define at least a second tubular internal diameter which is different from the first

tubular internal diameter, and at least a third woven extent contiguous with the second woven extent with a third selected number of warp yarns which is different from the first and said second selected number of warp yarns, with the third woven extent defining a third tubular internal diameter which is different from the first and second tubular internal diameters.

In a further embodiment of the present invention, there is provided a flat-woven implantable tubular prosthesis comprising:

a first substantially fluid-tight tubular woven section having a plurality of warp yarns and fill yarns,

a second substantially fluid-tight tubular woven section having a plurality of warp yarns and fill yarns,

a third substantially fluid-tight tubular woven section having a plurality of warp yarns and fill yarns and

a substantially fluid-tight woven crotch section having warp yarns from said first woven section gradually interwoven with warp yarns from each of said section and third woven sections to seamlessly contiguously join said first woven section to said second and third woven sections at said crotch section.

Additionally, methods of forming such endoluminal prostheses are also provided. In one of such methods, there is provided a method of forming a seamless flat-woven implantable tubular prosthesis including the steps of weaving a tubular wall having transitional diameter along a longitudinal extent thereof, such weaving including gradually engaging or disengaging additional warp yarns along the extent to transition from a first diameter to a second diameter different from the first diameter.

Another embodiment of the methods of the present invention includes a method of making a seamless flat-woven implantable tubular prosthesis including weaving a first section of the prosthesis having a first diameter using a first selected number of warp yarns, and transitioning to a second section of the prosthesis having a second diameter different from the first diameter by gradually engaging or disengaging warp yarns.



A further embodiment of the methods of the present invention includes a method of making a fiat-woven implantable tubular prosthesis comprising:

5 weaving a second substantially fluid-tight tubular woven section by using a plurality of warp yarns and fill yarns,

weaving a substantially fluid-tight woven crotch section by gradually

2000
 2001
 2002
 2003
 2004
 2005
 2006
 2007
 2008
 2009
 2010
 2011
 2012
 2013
 2014
 2015
 2016
 2017
 2018
 2019
 2020
 2021
 2022
 2023
 2024
 2025
 2026
 2027
 2028
 2029
 2030
 2031
 2032
 2033
 2034
 2035
 2036
 2037
 2038
 2039
 2040
 2041
 2042
 2043
 2044
 2045
 2046
 2047
 2048
 2049
 2050
 2051
 2052
 2053
 2054
 2055
 2056
 2057
 2058
 2059
 2060
 2061
 2062
 2063
 2064
 2065
 2066
 2067
 2068
 2069
 2070
 2071
 2072
 2073
 2074
 2075
 2076
 2077
 2078
 2079
 2080
 2081
 2082
 2083
 2084
 2085
 2086
 2087
 2088
 2089
 2090
 2091
 2092
 2093
 2094
 2095
 2096
 2097
 2098
 2099
 2100
 2101
 2102
 2103
 2104
 2105
 2106
 2107
 2108
 2109
 2110
 2111
 2112
 2113
 2114
 2115
 2116
 2117
 2118
 2119
 2120
 2121
 2122
 2123
 2124
 2125
 2126
 2127
 2128
 2129
 2130
 2131
 2132
 2133
 2134
 2135
 2136
 2137
 2138
 2139
 2140
 2141
 2142
 2143
 2144
 2145
 2146
 2147
 2148
 2149
 2150
 2151
 2152
 2153
 2154
 2155
 2156
 2157
 2158
 2159
 2160
 2161
 2162
 2163
 2164
 2165
 2166
 2167
 2168
 2169
 2170
 2171
 2172
 2173
 2174
 2175
 2176
 2177
 2178
 2179
 2180
 2181
 2182
 2183
 2184
 2185
 2186
 2187
 2188
 2189
 2190
 2191
 2192
 2193
 2194
 2195
 2196
 2197
 2198
 2199
 2200
 2201
 2202
 2203
 2204
 2205
 2206
 2207
 2208
 2209
 2210
 2211
 2212
 2213
 2214
 2215
 2216
 2217
 2218
 2219
 2220
 2221
 2222
 2223
 2224
 2225
 2226
 2227
 2228
 2229
 2230
 2231
 2232
 2233
 2234
 2235
 2236
 2237
 2238
 2239
 2240
 2241
 2242
 2243
 2244
 2245
 2246
 2247
 2248
 2249
 2250
 2251
 2252
 2253
 2254
 2255
 2256
 2257
 2258
 2259
 2260
 2261
 2262
 2263
 2264
 2265
 2266
 2267
 2268
 2269
 2270
 2271
 2272
 2273
 2274
 2275
 2276
 2277
 2278
 2279
 2280
 2281
 2282
 2283
 2284
 2285
 2286
 2287
 2288
 2289
 2290
 2291
 2292
 2293
 2294
 2295
 2296
 2297
 2298
 2299
 2300
 2301
 2302
 2303
 2304
 2305
 2306
 2307
 2308
 2309
 2310
 2311
 2312
 2313
 2314
 2315
 2316
 2317
 2318
 2319
 2320
 2321
 2322
 2323
 2324
 2325
 2326
 2327
 2328
 2329
 2330
 2331
 2332
 2333
 2334
 2335
 2336
 2337
 2338
 2339
 2340
 2341
 2342
 2343
 2344
 2345
 2346
 2347
 2348
 2349
 2350
 2351
 2352
 2353
 2354
 2355
 2356
 2357
 2358
 2359
 2360
 2361
 2362
 2363
 2364
 2365
 2366
 2367
 2368
 2369
 2370
 2371
 2372
 2373
 2374
 2375
 2376
 2377
 2378
 2379
 2380
 2381
 2382
 2383
 2384
 2385
 2386
 2387
 2388
 2389
 2390
 2391
 2392
 2393
 2394
 2395
 2396
 2397
 2398
 2399
 2400
 2401
 2402
 2403
 2404
 2405
 2406
 2407
 2408
 2409
 2410
 2411
 2412
 2413
 2414
 2415
 2416
 2417
 2418
 2419
 2420
 2421
 2422
 2423
 2424
 2425
 2426
 2427
 2428
 2429
 2430
 2431
 2432
 2433
 2434
 2435
 2436
 2437
 2438
 2439
 2440
 2441
 2442
 2443
 2444
 2445
 2446
 2447
 2448
 2449
 2450
 2451
 2452
 2453
 2454



BRIEF DESCRIPTION OF THE DRAWINGS:

5 Figures 1a, 1b and 1c depict perspective views of a graft constructed in accordance with the prior art.

Figures 2, 3, 4, 5, 6 and 7 depict perspective views of shaped grafts constructed in accordance with various embodiments of the present invention.

10 Figure 8 is a perspective view of a graft of the present invention having a first diameter tapering to a second diameter shown in a flat, radially compressed form after weaving but prior to heat setting.

Figure 9 is a cross-sectional view of the graft shown in Figure 8.

Figure 10 is a cross-sectional view of the graft of Figure 8 after heat setting.

Figures 11a and 11b are perspective views of weave patterns in accordance with the present invention.

15 Figure 12 is a perspective view of grafts being continuously flat-woven in accordance with the present invention, showing warp yarns gradually disengaged from the weave during weaving of one of the graft sections.

Figure 13 shows a photomicrograph of the internal woven portion of a crotch section of a bifurcated graft of the prior art at a magnification of 10x.

20 Figure 14 shows a photomicrograph of the internal portion of a crotch section of a bifurcated graft made in accordance with the present invention at a magnification of 10x.



Figures 15, 16 and 17 depict perspective views of bifurcated grafts constructed in accordance with alternative embodiments of the present invention.

Figure 18 depicts a perspective view of a trifurcated graft constructed in accordance with an alternative embodiment of the present invention.

5 Figure 19 shows a scanning electron micrograph of the internal portion of a crotch section of a bifurcated graft of the prior art at a magnification of 30x.

Figure 20 shows a scanning electron micrograph of the internal portion of the crotch section of a bifurcated graft made in accordance with the present invention at a magnification of 45x.

10 Figure 21 is a perspective view of a bifurcated graft of the present invention shown in a flat, radially compressed form after weaving, but prior to heat-setting.

Figure 22 is a cross-sectional view of the graft shown in Figure 21.

Figure 23 is a cross-sectional view of the graft of Figure 21 after heat setting.

15 Figure 24 is a perspective view of bifurcated grafts being continuously seamlessly flat-woven in accordance with the present invention, showing warp yarns gradually disengaged from the weave during weaving of the iliac sections.

Figure 25 is a perspective view of bifurcated grafts being continuously seamlessly flat-woven in accordance with the present invention, showing warp yarns gradually disengaged from the weave during weaving of the aortic section.

20 Figure 26 is a perspective view of the bifurcated graft of Figure 17 used in connection with the tapered graft of Figure 5, with an internal stent shown at one portion of the graft.

Figure 27 is a perspective view of the bifurcated graft of Figure 17 including an internal stent extending therethrough.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT:

It has been discovered through the present invention that tubular woven textile products such as vascular grafts can be seamlessly woven into a variety of shapes and sizes, without the need for any post-weaving fabrication techniques such as cutting, sewing, suturing and the like.

A recurrent problem and limitation in prior art techniques of tubular weaving can be evidenced through the prior art techniques for manufacturing split grafts, such as bifurcated grafts, trifurcated grafts, and the like. A split graft consists of a tubular graft section of a certain diameter, which splits at a crotch area into a plurality of tubular graft sections or members of a different diameter than the first graft section. For example, a bifurcated graft, as depicted in Figure 15, includes an aortic woven portion 620 with a crotch 627, and splits into first and second iliac woven portions 630a and 630b. For the purposes of the present invention, split grafts are designated as having a first graft section referred to as an aortic woven portion and second graft sections referred to as iliac woven portions or iliac leg sections, since in preferred embodiments, such split grafts, i.e. bifurcated grafts, are meant for implantation within the aorta at the branch of the iliac arteries, for instance, for use in repairing an aortic aneurism.

In conventional manufacturing processes for tubular weaving of bifurcated grafts, it was necessary to split the number of warp yarns at the crotch area during the weaving process in order to split the tubular woven graft from the first aortic woven portion 620 into the first and second iliac woven portions 630a and 630b. This splitting of warp yarns was necessary in order to accomplish the transition at the crotch 627, where the diameter of the graft transitions from a first inner diameter of the aortic woven portion 620 to two separate inner diameters representing the first and second iliac woven portions 630a and 630b. In prior art processes, however, such transition in split grafts from a first diameter to two equal second diameters was accomplished by

splitting the warp yarns evenly at the crotch 627 during the weaving process. It is known that it is desired to use an odd number of warp yarns in order to form a continuous plain weave pattern for tubular weaving. Thus, such splitting of the number of warp yarns in half at the crotch area in order to form iliac leg portions in prior art processes resulted in an incorrect number of warp yarns in one of the iliac leg portions, since the number of warp yarns required in the tubular weaving of the aortic portion was of an odd number, and splitting this odd number in half results in an odd number and an even number. Thus, in prior art processes, at least one of the iliac leg portions of a tubular woven graft often included an incorrect weave pattern at the flat-woven edge.

In an effort to correct this problem resulting in the wrong number of warp yarns in one of the iliac leg portions, the present inventors discovered that it is possible to disengage a warp yarn from the weave pattern for that portion of the weaving process required to weave the iliac leg portions without deleterious effects. In the prior art weaving processes the number of warp yarns generally remained constant throughout the weaving pattern, due to the inefficiencies and impracticability of disengaging a warp yarn for only a portion of the weaving pattern. The present invention utilizes specially designed software and a customized electronic tubular weaving machine for disengaging a warp yarn for a portion or portions of the weaving pattern. Thus, by disengaging one warp yarn from the weave pattern at the crotch area during the weaving process, an odd number of warp yarns could be utilized during the weaving of the iliac leg sections of the graft, and the correct weave pattern would be produced throughout the entire graft.

As previously discussed, a further problem with prior art processes in the manufacture of tubular woven grafts related to achieving precise diameters of the graft. Often times, the portion of a damaged blood vessel to be repaired included a taper or diameter change, wherein the blood vessel changes from one diameter to a second diameter over the area to be repaired. In the prior art, in order to compensate for such changes in diameters, a surgeon commonly cuts a seamless tubular woven graft along

its length, as demonstrated in Figures 1a, 1b and 1c. In Figure 1a, a seamless tubular woven graft 10' is depicted, having a first end 12' and a second end 14', with an internal diameter extending through the tubular graft. As shown in Figure 1b, a cut in the wall of the graft was made, leaving cut edges 13'. Thereafter, the cut edges 13' were sutured together by a surgeon with edge sutures 15', thereby providing a tubular woven graft 10' with one diameter at first end 12' which gradually tapers to a second diameter at second end 14' by way of taper seam 16'. Such a tapering process, however, involved a post-fabrication technique, resulting in a tubular woven graft which was no longer seamless and required additional steps after fabrication of the graft.

10 In order to overcome these problems, the present inventor discovered that such a tubular-woven graft could be tapered during the weaving process, producing a seamless tubular-woven graft having a tapered configuration, as well as a variety of other tapers, flares, and shapes as shown in Figures 2 through 7.

15 With reference to Figure 2, a typical seamless tubular-woven textile graft 10 in accordance with the present invention is shown generally as a tapered graft in a generally frustoconical shape. Graft 10 is a textile product formed of a woven synthetic fabric. Graft 10 is depicted in one embodiment in Figure 2 which includes a generally tubular body 17 having a first end 12 and an opposed second end 14, defining therebetween an inner lumen 18 which permits passage of blood once graft 10 is
20 implanted in the body. Graft 10 includes continuous transitional woven portion 25 extending between first end 12 and second end 14, and extending along the entire length of graft 10. Graft 10 of Figure 2 has a generally frustoconical shape, with first end 12 having a first tubular inner diameter and second end 14 having a second tubular inner diameter which is different than the inner diameter of first end 12. For example,
25 first end 12 may have an inner diameter of 12 millimeters and second end 14 may have an inner diameter of 10 millimeters, with transitional woven portion 25 forming a gradual taper having successive changes in diameter throughout such that graft 10 gradually tapers from the 12 millimeter inner diameter of first end 12 to the 10 millimeter inner diameter of second end 14 along the length of transitional woven

portion 25. The gradual tapering of transitional woven portion 25 is accomplished by gradually disengaging and/or engaging a selected number of warp yarns from the weaving pattern during weaving of the graft, as will be discussed in more detail herein.

Figures 3, 4, 5, 6 and 7 show various shapes of grafts that can be formed according to the present invention. Figure 3 shows a variation of the configuration of Figure 2, with graft 100 in the form of a step-tapered graft having a tubular body 117 with a first end 112 and an opposed second end 114 defining an inner lumen 118 therebetween. In the embodiment of Figure 3, graft 100 includes first woven portion 120 which defines a portion of tubular wall 117 having a continuous first inner diameter and second woven portion 130 which defines a portion of tubular wall 117 having a continuous second inner diameter which is different than the inner diameter of first woven portion 120. Graft 100 of Figure 3 further includes transitional woven portion 125 adjacent and contiguous with first and second woven portions 120 and 130. In such an embodiment, graft 100 includes a constant diameter extending through first woven portion 120 and a constant diameter which is different than the inner diameter of first woven portion 120 which extends through second woven portion 130, and gradually tapers from the inner diameter of first woven portion 120 to the inner diameter of second woven portion 130 through the length of transitional woven portion 125.

Figure 4 shows a further variation on the step-tapered configuration of Figure 3, with graft 200 having a tubular body 217 with a first end 212 and an opposed second end 214 defining an inner lumen 218 therebetween. In the embodiment of Figure 4, graft 200 includes a first woven portion 220 and a transitional woven portion 225, with the first woven portion 220 defining first end 212 and including a continuous inner diameter along the length thereof, and the transitional woven portion 225 defining second end 214 and including a gradual taper such that graft 200 gradually tapers from the inner diameter of first woven portion 220 to a second diameter at second end 214 which is different than the inner diameter of first woven portion 220. It is contemplated that such gradually tapering can be either an inward taper or an outward taper (flared).

Figure 5 shows a further variation on the configuration of graft 10 of Figure 2, with graft 300 having a tubular body 317 with a first end 312 and an opposed second end 314 defining an inner lumen 318 therebetween. In the embodiment of Figure 5, graft 300 includes a transitional woven portion 325 and a second woven portion 330, with the transitional woven portion 325 defining first end 312 and the second woven portion 330 including a continuous inner diameter along the length thereof, and defining second end 314. Further, transitional woven portion 325 includes a gradual taper such that graft 300 gradually tapers outwardly from the inner diameter of first end 312 to a second diameter at second end 314 which is different than the inner diameter of first end 312.

Figures 6 and 7 show further shapes which can be formed according to the present invention. Figure 6 depicts a sinusoidal shaped graft 400 having a tubular body 417 with a first end 412 and an opposed second end 414 defining an inner lumen 418 therebetween. In the embodiment of Figure 6, graft 400 includes a continuous first woven portion 420, with the first woven portion 420 defining both first and second ends 412 and 414. First woven portion 420 has a continuous inner diameter along the length thereof, such that first end 412 and second end 414 have the same inner diameter. Graft 400 is shaped along its length in an "S" configuration, with tubular body 417 gradually changing direction as warp yarns on one edge of graft 400 during the weaving process are engaged or disengaged while the same portion of tubular body 417 on the other edge of graft 400 equally changes in the same direction as warp yarns are engaged or disengaged at this edge. Thus, as warp yarns at one edge of the graft are disengaged as that edge and shape of the graft gradually curves, the corresponding warp yarns at the opposite edge on the same pick are engaged. As the "S" shape again changes direction, the opposite may be true, i.e., warp yarns at a given pick on one edge may be engaging as corresponding warp yarns at the other edge on the same pick may be disengaging. In order to maintain a constant diameter, the warp yarns at each of the edges of the tubular graft must simultaneously change by additionally adding or engaging an equal number of warp yarns on one edge as the other edge loses or disengages warps. Thus, the total number of warp yarns within the tubular wall remains constant during the weaving process.

Figure 7 depicts a variation of the sinusoidal shaped graft 400 shown in Figure 6. Graft 500 in Figure 7 includes a tubular body 517 with a first end 512 and an opposed second end 514 defining an inner lumen 518 therebetween. In the embodiment of Figure 7, graft 500 includes first woven portion 520 having a first inner diameter and second woven portion 530 having a second inner diameter which is different than the inner diameter of first woven portion 520. Graft 500 further includes transitional woven portion 525 adjacent first and second woven portions 520 and 530. For example, first woven portion 520 may include a woven graft section having an inner diameter of 12 millimeters and second woven portion 530 may include a woven graft section having an inner diameter of 10 millimeters, with transitional woven portion 525 forming a gradual taper such that graft 500 gradually tapers from the 12 millimeter inner diameter of first woven portion 520 to the 10 millimeter inner diameter of second woven portion 530 along the length of transitional woven portion 525. Graft 500 is shaped along its length in an "S" configuration similar to the manner in Figure 6, with tubular body 517 gradually tapering in on one side of graft 500 during the weaving process while the same portion of tubular body 517 on the other side of graft 500 tapers outwardly.

While a variety of shapes and configurations are shown in the drawings and described herein, any seamless tubular flat-woven graft incorporating a gradual transitional continuously woven portion is contemplated by the present invention. The gradual tapering of the transitional woven portion is accomplished in each of the inventive embodiments by gradually disengaging and/or engaging a selected number of warp yarns from the weaving pattern during weaving of the graft, as will be discussed in more detail herein.

Through the present invention it is now possible to accomplish disengaging and/or engaging of selected warp yarns to create gradual changes with size, shape or configuration of the graft during weaving of the graft. It has been discovered through the present invention, however, that such disengaging and/or engaging of the warp

yarns must be accomplished in a gradual transition in order to prevent holes or voids between the contiguous sections of the woven graft. It is known that a delicate balance exists between porosity of the graft for proper ingrowth and the need in many applications for fluid-tight walls. It has been determined that a void greater than the diameter of about three warp yarns results in a graft with a porosity which is unacceptable as a fluid-tight conduit and may be incapable of sufficiently maintaining blood pressure therein. Thus, the transition from a graft section of one diameter to a graft section of another diameter must be accomplished in fluid-tight applications without creating such voids between the contiguous weave sections which are generally greater than the diameter of three warp yarns. In applications where fluid-tight walls are not crucial, the size of such voids may of course be greater.

Any type of textile product can be used as the warp yarns and fill yarns of the present invention. Of particular usefulness in forming the woven prostheses of the present invention are synthetic materials such as thermoplastic polymers. Thermoplastic yarns suitable for use in the present invention include, but are not limited to, polyesters, polypropylenes, polyethylenes, polyurethanes and polytetrafluoroethylenes. The yarns may be of the monofilament, multifilament, or spun type.

The yarns used in forming the woven grafts of the present invention may be flat, twisted or textured, and may have high, low or moderate shrinkage properties. Additionally, the yarn type and yarn denier can be selected to meet specific properties desired for the prosthesis, such as porosity, flexibility and compliance. The yarn denier represents the linear density of the yarn (number of grams mass divided by 9,000 meters of length). Thus, a yarn with a small denier would correspond to a very fine yarn whereas a yarn with a larger denier, e.g., 1000, would correspond to a heavy yarn. The yarns used with the present invention may have a denier from about 20 to about 1000, preferably from about 40 to about 300. Preferably, the warp and fill yarns are polyester, and most preferably the warp and fill yarns are one ply, 50 denier, 48 filament flat polyester.

The graft of the present invention can be woven using any known weave pattern in the art, including, simple weaves, basket weaves, twill weaves, velour weaves and the like, and is preferably woven using a flat plain tubular weave pattern, most preferably with about 170-190 warp yarns (ends) per inch per layer and about 86-90 fill yarns (picks) per inch per layer. The wall thickness of the graft may be any conventional useful thickness, but is preferably no greater than about 0.16 mm, with the most preferable wall thickness being from about 0.07 mm to about 0.14 mm. These thicknesses facilitate the folding of the graft into an appropriate delivery system. Moreover, the seamless (i.e., sutureless) feature of the present invention further facilitates packing and folding of the graft into the delivery system.

As noted, transition from one diameter to another diameter is accomplished by gradually engaging and/or disengaging selected warp yarns from the weave pattern. In the present invention, it has been discovered that such a transition can be effectively accomplished by engaging or disengaging a maximum of three warp yarns per four successive machine picks for a given weave pattern on each edge of the graft. Such disengaging or engaging of warp yarns can be accomplished in any combination of numbers. For example, up to three warp yarns can be disengaged or engaged at any of the four successive machine picks, as long as the total number of warp yarns engaged and/or disengaged does not exceed a maximum of three warp yarns per four machine picks on each edge of the tubular flat-woven product. An edge is defined as an outer limit of the graft width as taken along the longitudinal axis as the graft is flat-woven on the loom. Figure 8 shows such edges at 117c. As previously noted, two machine picks represents one filling pick of tubular fabric, i.e., one tubular fill yarn. Thus, four machine picks represents two tubular fill yarns.

As noted above, preferably the tubular-woven graft of the present invention is constructed of polyester which is capable of shrinking during a heat set process. For instance, such grafts are typically flat-woven in a tubular form. Due to the nature of the flat-weaving process, the tubular graft is generally flat in shape after weaving, as depicted in Figure 8, which shows a graft 100 in one embodiment of the present

invention as flat-woven in a tubular step-tapered form as shown in Figure 3. As shown in cross-sectional view in Figure 9, such a flat-woven tubular graft subsequent to weaving a generally elliptical-shape. Such grafts, however, when constructed of heat-settable polyester yarn, can be heat set on a mandrel to form a generally circular shape, as depicted in Figure 10.

Such a heat setting process is accomplished by first flat-weaving the graft in a tubular form out of a material capable of shrinking during a heat setting process. After the graft is woven, the graft is placed on a mandrel, and heated in an oven at a temperature and time capable of causing the yarns of the graft to heat set to the shape and diameter of the mandrel. Preferably polyester yarns are used as the warp and fill yarns, and the heat setting is accomplished at time and temperatures appropriate for the material. For example, heat setting can be accomplished at about 190-200° C for a period of about 14-16 minutes. Other methods of heat setting known in the art may be employed. After such a heat setting process, the graft can be formed into a shape desired for implantation, having a generally circular inner lumen.

As noted above, due to the nature of the flat-weaving process, while graft 100 is tubular, it is generally flat in shape during weaving and prior to the aforementioned heat setting, as shown in Figure 9. The post-fabrication flat shape of tubular wall 117 is comprised of top tubular body portion 117a and bottom tubular body portion 117b, which connect at tubular body edges 117c. While reference has been made to a heat setting process for forming graft 100 into a generally cylindrical shape as shown in Figure 10, graft 100 can be provided as a finished product in the generally flat shape shown in Figure 9, or can be made cylindrical in shape by any known methods. Further, crimping of the graft 100 along the length of tubular wall 117 to provide structural integrity is contemplated.

Figure 11a shows a conventional plain tubular weave pattern known in the art. Warp yarns 160 are further shown as 160a indicating they are in the top layer of the weave and 160b indicating their presence in the bottom layer of the weave. Top warp

yarns 160a and bottom warp yarns 160b run in a lengthwise direction in the graft and define the width of the graft. Fill yarns 170 are further shown as top fill yarns 170a and bottom fill yarns 170b. These fill yarns are woven with the top and bottom warp yarns 160a and 160b as shown in Figure 11a in a manner known in the art. For example, a
5 filling yarn shuttle (not shown) passes across warp yarns 160 while selected warp yarns 160 are lifted according to a specific weave pattern. In electronic weaving machines, such weave patterns can be programmed using software into the machine. In a typical plain tubular weave as depicted in Figure 11a, the shuttle first weaves top fill yarn 170a
10 by passing across warp yarns 160 while certain warp yarns 160 are lifted. During travel of top fill yarns 170a (direction X) for weaving of the top tubular body portion such as top tubular body portion 117a of graft 100, the bottom warp yarns 160b are not lifted to prevent top fill yarns 170a from interweaving with bottom warp yarns 160b. Likewise,
15 during passage of bottom fill yarns 170b (direction Y) for weaving of the bottom tubular body portion such as the bottom tubular body portion 117b of graft 100, the top warp yarns 160a are always lifted such that bottom fill yarns 170b are not interwoven with top warp yarns 160a. The plain tubular weave pattern as just described can be used to form straight portions of the inventive grafts which have a constant diameter. This pattern is then modified by gradually engaging or disengaging warp yarns to create
tapers and/or shapes.

20 For example, the plain weave pattern shown in Figure 11a and described above is formed by continuously passing top and bottom fill yarns 170a and 170b back and forth across warp yarns 160 to form first woven portion 120 of graft 100 shown in Figure 12.

Figure 11b shows a plain tubular weave pattern having a gradual disengaging of
25 warp yarns. As seen in Figure 11b, warp yarns 160' have been disengaged from the pattern and are no longer interwoven beginning at the fill yarn 170'. Likewise, the next set of picks shows an additional warp yarn being disengaged. As noted, the pattern is within the maximum disengagement of three warp yarns per four machine picks.

The disengaging of the warp yarns is accomplished by dropping the desired warp yarns from the end of the tubular flat-woven graft during the weaving process, such that the fill yarns are not interwoven across the warp yarns for that section of the pattern. Such dropping of warp yarns in a gradual manner forms the transitional portion of the graft. In continuous flat-weaving processes, the warp yarns are then re-engaged during the weave pattern once the transitional section has been completed. Once the complete graft has been woven, the weave pattern may be repeated creating the next graft to be woven in a continuous process.

Figure 12 shows a plurality of grafts 100 being woven in a continuous flat-weaving process, in accordance with the present invention. First woven portion 120 is of one inner diameter, for instance 24 millimeters, while second woven portion 130 is of another inner diameter different than that of first woven portion 120, for instance 18 millimeters. As such, first woven portion 120 requires more warp yarns 160 for weaving than does second woven portion 130. Thus, at transitional portion 125, the warp yarns are gradually disengaged from the weave, as depicted by disengaged warp yarns 160'. Since the grafts of the present invention are preferably fabricated using a continuous flat-weaving process, disengaged warp yarns 160' must be re-engaged into the weave pattern after completion of the second woven portion in order to begin weaving the first woven portion of the subsequent graft to be produced. Through such a continuous flat-weaving process, a plurality of grafts 100 can be woven in a continuous manner, and can be cut apart along line C after fabrication. Furthermore, disengaged warp yarns 160' are removed subsequent to weaving.

For flat-weaving of bifurcated tubular grafts, prior art processes typically involved splitting of the warp yarns in half at the portion of the weave pattern where the graft splits from the aortic graft portion to the iliac leg portions, with the iliac leg sections of the graft therefore being woven with half the number of warp yarns as the aortic section of the graft. With such techniques, however, variations in the diameters of the iliac leg sections could not be accomplished in a seamless manner. Typically, when a tubular woven bifurcated graft with two different diameter iliac leg portions

was required, i.e., when a tubular woven bifurcated graft having iliac leg portions with diameters different than that which would be formed by splitting the number of warp yarns in half was desired, the bifurcated graft would have to be first woven in a conventional manner, followed by cutting and suturing of the iliac to achieve the
5 desired diameter. As discussed above, grafts produced in such a manner resulted in many drawbacks. For instance, the suture seam added to the wall thickness of the graft and added a discontinuity to the internal wall surface of the graft. Further, grafts requiring such post-fabrication suturing resulted in voids in the graft wall from the needle which was used for suturing. Figure 13 shows a photomicrograph of an
10 enlarged view of the internal portion of a prior art bifurcated graft woven of warp yarns 161 and fill yarns 171 at the crotch area 627' of the graft, where the two iliac leg portions branch off from the aortic portion. Needle holes 140 are present in the wall of the graft, representing holes through the graft wall which were made by a needle during suturing of the iliac leg portions to the aortic portion.

15 Through the present invention, split grafts such as bifurcated grafts can be flat-woven in a tubular form with varying diameters in the iliac portions and the aortic portion, without the need for such post-fabrication suturing. This is accomplished by a gradual transition in the number of warp yarns in the weave of the graft, as accomplished in the tapered grafts discussed above. Such gradual transition is
20 accomplished by gradually engaging or disengaging warp yarns during the fabrication of the graft at the transition from the aortic graft portion to the iliac leg portions of the graft. A bifurcated graft produced in this manner is shown in an enlarged view at Figure 14. Figure 14 shows a bifurcated graft having first and second iliac woven
25 portions 630a and 630b. As compared with the prior art graft shown in Figure 13, the needle holes 140 which were created from the suturing needle required for attachment of the iliac legs in the prior art grafts are not present in the graft produced in accordance with the present invention.

Referring generally to Figure 15, a typical tubular woven bifurcated graft 600 includes a generally tubular body 617 having a first end 612 and opposed second ends

614a and 614b, defining therebetween an inner lumen 618 which permits passage of blood once bifurcated graft 600 is implanted in a blood vessel. Bifurcated graft 600 includes aortic woven portion 620 having a first inner diameter, and further includes first and second iliac woven tubular wall portions 630a and 630b each having an inner diameter which is different than the inner diameter of aortic woven portion 620. The inner diameters of first and second iliac woven portions 630a and 630b can be the same, as depicted in Figure 15, or can be different, as depicted in 730a and 730b of Figure 16. Further, iliac woven portions 630a and 630b can be of the same general length as shown in Figures 15 and 16, or can be of different general lengths, as shown at 830a and 830b in Figure 17. Bifurcated graft 600 further includes bifurcated transitional woven portion 625 contiguous with aortic woven portion 620 and first and second iliac woven portions 630a and 630b at crotch 627 forming a bifurcated arch. Bifurcated transitional woven portion 625 forms a gradual taper such that bifurcated graft 600 gradually tapers from the inner diameter of aortic woven portion 620 to the inner diameters of first and second iliac woven portions 630a and 630b along the length of bifurcated transitional woven portion 625. The gradual tapering of bifurcated transitional woven portion 625 is accomplished by gradually disengaging and/or engaging a selected number of warp yarns from the weaving pattern during weaving of the graft, as accomplished in the preferred embodiment discussed above.

Figure 18 depicts a trifurcated graft 900 in accordance with an alternative embodiment of the present invention. Trifurcated graft 900 is of the same general configuration as bifurcated graft 600 shown in Figure 17, including a generally tubular body 917 having first end 912, second ends 914a, 914b and 914c with first woven portion 920, transitional woven portion 925, first and second iliac woven portions 930a and 930b, and further includes an additional iliac leg as iliac woven portion 930c. Further, trifurcated graft 900 also includes crotches 927a, 927b and 927c (not shown), extending between transitional woven portion 925 and each of iliac woven portions 930a, 930b and 930c.

Prior art processes for tubular weaving of split grafts such as bifurcated and trifurcated grafts and the like resulted in holes or voids in the crotch area of the grafts, which in certain applications further resulted in undesirable porosity for the graft. The porosity of grafts is of vital importance, since such grafts are to be implanted into the body as fluid conduits and therefore must be of a porosity which prevents undesirable fluid leakage through the wall of the graft. The voids which were formed in the crotch area of bifurcated grafts produced by the prior art tubular weaving techniques resulted in high porosity of the graft at the crotch area and required suturing before they were acceptable for implantation. A bifurcated graft woven of warp yarns 161 and fill yarns 171 having such reinforcement sutures is depicted in Figure 19, representing the prior art. Figure 19 is a scanning electron micrograph of a prior art bifurcated graft showing the crotch area in an enlarged view. Warp yarns 161 and fill yarns 171 are seen generally in the micrograph. Crotch sutures 150 are shown, which undesirably create an added area of wall thickness in the graft.

The present inventor has discovered that such voids in the crotch area of a split graft can be avoided by gradually transferring the warp yarns during the weaving process from one woven section to another woven section contiguous thereto, thereby avoiding the necessity for post-fabrication suturing of voids. Thus, as depicted in Figure 20, a closed weave is established in crotch 627 of a bifurcated graft 600, by gradually transferring the warp yarns during the weaving process from one woven section to another woven section contiguous therewith.

For example, during weaving of the bifurcated graft 600, as shown in Figure 15, the warp yarns 160 which are being interwoven by the fill yarns 170 are gradually transferred from the aortic woven section 620 and the transitional woven section 625 to each of the iliac woven portions 630a and 630b.

Further, during weaving of bifurcated graft 600, two separate filling yarn shuttles (not shown) are required for weaving of the two distinct iliac woven portions 630a and 630b. To form the gradual transition in the crotch 627 avoiding holes, the

shuttle designated for weaving of iliac woven portion 630a selectively and gradually engages warp yarns designated for weaving of iliac woven portion 630b. Likewise, the shuttle designated for weaving iliac woven portion 630b selectively and gradually engages warp yarns designated for weaving of iliac woven portion 630a. In this
5 manner, the crotch 627 is woven using a simultaneous tapering effect at the interface between the aortic woven portion 620 and iliac woven portions 630a and 630b. As such, a smooth contiguous surface transition is obtained.

When weaving materials for implantation such as vascular grafts, however, it is necessary to provide exact inner diameters for the woven grafts. It has been discovered
10 that, when using heat setting yarns such as polyester for the weaving yarns, the actual diameter after heat setting of the yarns is not easily predictable using conventional techniques. For example, in the prior art weaving of a tubular bifurcated graft having an aortic graft section of 26 millimeter inner diameter and two iliac leg sections of 13 millimeter inner diameter, the warp yarns were split in half in order to weave the iliac
15 leg sections, with 627 warp yarns required for weaving of the aortic graft section, and 313 warp yarns (half of 627) being used for weaving of each of the iliac leg sections. When such a graft was flat-woven of polyester in tubular form and then heat set, however, the exact diameters of 26 millimeters for the aortic section and 13 millimeters for each of the iliac leg sections was not accomplished. Although the aortic section
20 achieved the 26 millimeter diameter, the iliac leg portions shrunk to a smaller diameter than 13 millimeters, making the graft difficult to remove from the mandrel. Thus, the graft was not a true 26x13x13 set of diameters.

As noted above, the invention employs customized, programmable electronic jacquard weaving machines to gradually engage and/or disengage selected warp yarns
25 from the weaving pattern during weaving of a flat-woven tubular product. With such capabilities, the present inventor has discovered that the number of warp yarns required for each of the tubular segments having different diameters can be pre-determined to account for the variation in heat shrinkage from one diameter to the next. Thus, in yet another alternate embodiment of the present invention, a method of forming a flat-

woven synthetic tubular implantable prosthesis having a precise pre-determined internal diameter is provided. In the method, a desired weaving pattern is first selected for constructing the prosthesis. Preferably, the weaving pattern is selected from the group consisting of a simple weave (plain weave), a basket weave, a twill weave, and velour weaves. A desired yarn size and yarn diameter is then provided for the weaving pattern. The density at which the yarn is to be woven in the weave is then chosen, represented by a specific number of warp yarns per unit diameter. Additionally, a selected number of warp yarns is provided for weaving a suitable tubing edge. The desired internal diameter of the tubular prosthesis is then selected. Based upon knowing these parameters, the total number of warp yarns required to weave the tubular prosthesis with such a desired internal diameter can be calculated using the following formula:

$$N = S + (D \times p)$$

wherein N represents the total number of warp yarns required, S represents the number of edge warp yarns required to weave a suitable tubing edge, D represents the desired internal diameter and p represents the number of warp yarns per unit of diameter. By applying the aforementioned steps, it has been discovered that an exact inner diameter for a given synthetic tubular woven product can be predetermined to account for variation in shrinkage due to heat setting. In a preferred embodiment, S is 29 when the diameter D is an even number, and S is 28 when the diameter is an odd number. In such a preferred embodiment, the density p is 23 using a 1 ply/50 denier/48 filament polyester yarn.

Turning now to Figures 21-23, bifurcated graft 600 of Figure 21 is depicted in a generally flat tubular shape subsequent to weaving, with top tubular wall portion 617a and bottom tubular wall portion 617b connecting at tubular edges 617c in a similar means as graft 100, previously discussed with relation to Figures 8-10.

Further, Figures 24 and 25 show a plurality of bifurcated grafts 600 being woven in a continuous flat-weaving process, in accordance with one embodiment of the present invention. Bifurcated grafts 600, as shown in Figures 24 and 25, are woven in a similar manner as grafts 100, depicted in Figure 12. In Figure 24, however, bifurcated graft 600 includes aortic woven portion 620 and first and second iliac woven portions 630a and 630b, with aortic woven portion 620 requiring more warp yarns for weaving than the iliac woven portions 630a and 630b. As such, during weaving of the iliac woven portions 630a and 630b, selected warp yarns are gradually disengaged from the weave at transitional woven portion 625 as represented by disengaged warp yarns 660'. In Figure 25, iliac woven portions 630a and 630b require more warp yarns for weaving than aortic woven portion 620, and thus the disengaged warp yarns 660' are disengaged during weaving of the aortic woven section.

The tubular prostheses formed in accordance with the present invention can be used in surgical procedures as well as non-invasive procedures. Alternatively, the tubular prostheses of the present invention can be used in conjunction with a variety of stents in order to maintain the prostheses within the lumen of the body to be repaired. For example, Figure 26 shows a bifurcated graft 600 in accordance with one embodiment of the present invention, including a stent 50 affixed thereto at one portion of bifurcated graft 600. Figure 27 shows a bifurcated graft 600 in accordance with an alternative embodiment of the present invention, having stent 50 substantially along the entire length of tubular wall 617, positioned within the inner lumen of bifurcated graft 600. Such a stent 50 is well known in the art, and can be constructed in any desired shape and of any material known in the art, for example, a shaped memory alloy, as disclosed in International Application No. PCT/US95/01466, incorporated herein by reference. It is contemplated by the present invention that stent 50, as well as other stent types, can be used in such a manner with any of the tubular woven grafts of the present invention.

EXAMPLES

Unless otherwise noted, the grafts of all of the following examples were flat-woven in a tubular configuration using an electronic jacquard weaving machine. All of the grafts were flat-woven using a plain tubular weave pattern. The warp yarns and the fill yarns were constructed of single ply, 50 denier, 48 filament polyester with 170-190 warp ends per inch per layer and 86-90 fill yarns per inch per layer.

Example 1

The purpose of Examples 1 and 2 are to demonstrate that even when the electronic jacquard loom is used, unless the gradual engagement or disengagement of warp yarns is employed in accordance with the present invention, acceptable void free grafts will not be obtained.

A stepped graft (no taper) was flat-woven on an electronic jacquard loom in a tubular configuration to produce a 12 millimeter inner diameter section of the graft and a 10 millimeter inner diameter portion of the graft. The number of warp yarns required for weaving the 12 millimeter inner diameter portion of the graft was calculated using the above-mentioned method for pre-determining the number of warp yarns required to achieve the true desired diameters upon heat shrinking as follows:

$$N = S + (D \times p)$$

$$N = 29 + (12 \times 23)$$

$$N = 305$$

The number of warp yarns required for weaving the 10 millimeter inner diameter portion of the graft was similarly calculated as follows:

$$N = 29 + (10 \times 23)$$

$$N = 259$$

The 12 millimeter inner diameter portion of the graft was first flat-woven to a desired length. During the flat-weaving process, 46 warp yarns were disengaged from the weaving pattern all at once, i.e., at a single machine pick, in order to produce the 10 millimeter inner diameter portion of the graft. The graft thus produced included a 12 millimeter inner diameter portion and a 10 millimeter inner diameter portion. The transition between the two portions, however, included large holes between the weave sections of the graft which were visible to the naked eye.

Example 2

A graft having a 12 millimeter inner diameter portion and a 10 millimeter inner diameter portion was flat-woven in a manner similar to that of Example 1. During the transition from the 12 millimeter inner diameter portion to the 10 millimeter inner diameter portion, however, all 46 warp yarns were not disengaged at once transitioning to the 10 millimeter diameter portion. Instead, 4 or more warp yarns were disengaged for every 2 machine picks. The graft thus produced included a 12 millimeter inner diameter portion and a 10 millimeter inner diameter portion. The transition between the two portions, however, also included unacceptable holes between the weave sections of the graft which were visible to the naked eye.

Example 3

This example demonstrates the requirement for a maximum of three warp yarns which can be engaged or disengaged for every 4 machine picks. A graft having a 12 millimeter inner diameter portion and a 10 millimeter inner diameter portion was flat-woven in a manner similar to that of Example 2. During the transition from the 12 millimeter inner diameter portion to the 10 millimeter inner diameter portion, either 1 or 2 warp yarns were disengaged for every 4 machine picks, with a maximum of 3 warp yarns being disengaged for every 4 machine picks. The graft thus produced included a 12 millimeter inner diameter portion and a 10 millimeter inner diameter portion. The

transition between the two portions included a gradual transition with no holes between the weave sections of the graft.

Example 4

5 This example demonstrates that the selection of the number of warp yarns for each desired diameter of a bifurcated graft must be made using the inventive method steps in order to obtain the true desired diameters and account for variation in heat shrinkage. A set of bifurcated grafts were flat-woven in a tubular configuration to produce an aortic section having a 24, 26 and 28 millimeter inner diameter and two
10 iliac leg sections having a 12, 13 and 14 millimeter inner diameter for each leg section, respectively. The aortic section of the grafts were first flat-woven. When the weave reached the bifurcation portion, the previously described inventive method of gradually changing the warps was not employed. Instead, the number of warp yarns were split all at once, i.e., at a given pick, with one warp yarn being disengaged as necessary for one
15 leg of the iliac leg section in order to produce the correct weave pattern (obtain an odd warp yarn number). The number of warp yarns used for each graft is shown in Tables 1-3.

None of the number of warp yarns for the aortic or the iliac sections were determined using the aforementioned inventive method, and as such, none of the warp yarn numbers were calculated in accordance with the formula stated therein.

20

Table 1

	NUMBER OF WARP YARNS USED FOR 24 mm AORTIC SECTION	NUMBER OF WARP YARNS USED FOR EACH 12 mm ILIAC SECTION
Graft 1A	583	291
Graft 1B	587	293
Graft 1C	591	295
Graft 1D	595	297

Table 2

	NUMBER OF WARP YARNS USED FOR 26 mm AORTIC SECTION	NUMBER OF WARP YARNS USED FOR EACH 13 mm ILIAC SECTION
Graft 2A	657	313
Graft 2B	631	315
Graft 2C	635	317
Graft 2D	639	319

Table 3

	NUMBER OF WARP YARNS USED FOR 28 mm AORTIC SECTION	NUMBER OF WARP YARNS USED FOR EACH 14 mm ILIAC SECTION
Graft 3A	675	337
Graft 3B	679	339
Graft 3C	683	341
Graft 3D	687	343

After the grafts were woven, they were placed on steel mandrels and heat set in an oven for a sufficient time and temperature to heat-set their shapes and size, i.e., at a temperature of 190-200° C for 14-16 minutes. After removing the grafts from the mandrels, the aortic section of each of the grafts was properly heat set to an inner diameter of 24, 26 and 28 millimeters. The iliac leg sections, however, were heat set too tightly on the mandrels, making it difficult to remove the leg sections from the mandrels. The actual inner diameter of each of the iliac leg sections was less than the desired 12, 13 and 14 millimeters, respectively.

Example 5

The following example demonstrates the use of the inventive method of forming a bifurcated graft of a desired diameter. This invention also shows, however, that when the rate of changing (disengaging or engaging) the warp yarns is greater than 3 warp yarns per 4 machine, unacceptable voids are present in the weave.

A set of bifurcated grafts were flat-woven in a tubular configuration in a similar manner as in Example 4, to produce an aortic section having a 24, 26, and 28 millimeter inner diameter and two iliac leg sections having a 12, 13 and 14 millimeter inner diameter for each leg section, respectively. The aortic section of the grafts were first flat-woven. When the weave reached the bifurcation portion, the number of warp yarns was adjusted by disengaging warp yarns from the weave pattern at a rate of 4 warp yarns being disengaged for every 4 machine picks. The total number of warp yarns used for each graft was calculated by the formula as described herein.

$$N = S + (D \times p)$$

The calculated warp yarn numbers for each diameter section is set forth in the tables below.

Table 4

	NUMBER OF WARP YARNS USED FOR 24 mm AORTIC SECTION	NUMBER OF WARP YARNS USED FOR EACH 12 mm ILIAC SECTION
Graft 4	581	305

Table 5

	NUMBER OF WARP YARNS USED FOR 26 mm AORTIC SECTION	NUMBER OF WARP YARNS USED FOR EACH 13 mm ILIAC SECTION
Graft 5	627	327

Table 6

	NUMBER OF WARP YARNS USED FOR 28 mm AORTIC SECTION	NUMBER OF WARP YARNS USED FOR EACH 14 mm ILIAC SECTION
Graft 6	673	351

After the grafts were woven, they were placed on steel mandrels and heat set in an oven at a temperature of 190-200° C for 14-16 minutes. After removing the grafts from the mandrels, the aortic section of each of the grafts was properly heat set to an

inner diameter of 24, 26 and 28 millimeters, respectively. The iliac leg sections were also properly heat set to an inner diameter of 12, 13 and 14 millimeters, respectively. When the disengaged warp yarns were removed from the exterior portion of the aortic graft section, however, holes visible to the naked eye were present in the tubular wall of the graft at the transition between the aortic portion and the iliac leg portions.

Example 6

This example demonstrates the use of this inventive embodiments, i.e., using gradually disengaged warp yarns to transition from the aortic section to the iliac sections, and the use of the inventive method of calculating the number of warp yarns required for a given diameter.

A set of bifurcated grafts were flat-woven in a tubular configuration in the same manner as in Example 5, to produce an aortic section having a 24, 26 and 28 millimeter inner diameter and two iliac leg sections having a 12, 13 and 14 millimeter inner diameter for each leg section, respectively. When the weave reached the bifurcation portion, however, the number of warp yarns was adjusted by disengaging warp yarns from the weave pattern at a rate of no more than 3 warp yarns being disengaged for every 4 machine picks. After the grafts were woven, they were heat set in the same manner as in Example 5. After removing the grafts from the mandrels, the inner diameters of the aortic section of each of the grafts measured 24, 26 and 28 millimeters, respectively, and diameters of the iliac leg sections measured 12, 13 and 14 millimeters, respectively. The precise desired inner diameters were thus obtained using the inventive method of determining the proper number of warp yarns necessary to account for heat set shrinkage. Moreover, when the disengaged warp yarns were subsequently removed from the exterior portion of the aortic graft section, no holes were present in the tubular wall of the graft at the transition between the aortic portion and the iliac leg portions. This clearly demonstrates the necessity for the gradual change in warp yarns as claimed herein.

WO 97/43983

PCT/US97/08602

The invention being thus described, it will now be evident to those skilled in the art that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention and all such modifications are intended to be included within the scope of the following claims.

WHAT IS CLAIMED IS:

1. A flat-woven implantable tubular prosthesis having warp yarns and fill yarns comprising first and second spaced apart portions which define therebetween a transition tubular wall extent, said first portion having a first diameter and said second portion having at least a second diameter different from said first diameter, said tubular
5 prosthesis further including a weaving pattern along said transition tubular wall extent, said weaving pattern having a gradual change in the number of warp yarns to provide a seamless transition between said first portion and said second portion.
2. The prosthesis of claim 1 further including a first tubular wall seamlessly contiguous with said first portion of said transition tubular wall extent and having a constant diameter.
3. The prosthesis of claim 2 further including a tubular wall seamlessly contiguous with said second portion of said transition tubular wall extent and having a constant diameter.
4. The prosthesis of claim 1 wherein said transition tubular wall extent is generally frustoconical in shape.
5. The prosthesis of claim 1 wherein said transition tubular wall extent is generally "S" shaped.
6. The prosthesis of claim 1 wherein said gradual change in the number of warp yarns is defined by a change of no more than 3 of said warp yarns for every 2 of said tubular fill yarns.
7. The prosthesis of claim 1 wherein said warp and fill yarns include materials selected from the group consisting of polyester, polypropylene, polyethylene, polyurethane, polytetrafluoroethylene and mixtures thereof.

8. The prosthesis of claim 3 further including a plurality of said second tubular walls each seamlessly contiguously woven with said second portion of said transition tubular wall extent.
9. The prosthesis of claim 8 wherein said plural second tubular walls and said second portion of said transition tubular wall extent define a seamless crotch.
10. The prosthesis of claim 9 further including a pair of said second tubular walls defining a bifurcated structure.
11. The prosthesis of claim 10 wherein said bifurcated structure includes said pair of said second tubular walls of different diameters.
12. The prosthesis of claim 10 wherein said bifurcated structure includes said pair of second tubular walls of equal diameter.
13. The prosthesis of claim 1 further including a stent affixed thereto.
14. A flat-woven implantable tubular prosthesis comprising first and second ends defining a tubular wall therebetween, said tubular wall including warp yarns and fill yarns, said tubular wall being defined by a first elongate woven section with a first selected number of warp yarns therealong to define a first tubular internal diameter, and
5 a second elongate woven section seamlessly contiguous with said first woven section and having a gradual change in the number of warp yarns therealong to define at least a second tubular internal diameter.
15. The prosthesis of claim 14 wherein said second woven section is inwardly tapered.
16. The prosthesis of claim 14 wherein said second woven section is outwardly flared.

17. The prosthesis of claim 14 further including at least a third elongate woven section seamlessly contiguous with said second woven section.
18. The prosthesis of claim 17 wherein said third woven section comprises a pair of elongate tubular members seamlessly joined by a crotch section to said second section.
19. The prosthesis of claim 18 wherein said tubular members have equal diameters.
20. The prosthesis of claim 18 wherein said tubular members have different diameters.
21. The prosthesis of claim 18 wherein said pair of tubular members have different lengths.
22. A flat-woven tubular implantable prosthesis having warp yarns and fill yarns comprising first and second ends defining a tubular wall therebetween, said tubular wall having a first woven extent with a first selected number of warp yarns therealong to define a first tubular internal diameter, a transitional second woven extent contiguous with said first woven section with at least a second selected number of warp yarns therealong to define at least a second tubular internal diameter which is different from said first tubular internal diameter, and at least a third woven extent contiguous with said second woven extent with a third selected number of warp yarns which is different from said first and said second selected number of warp yarns, said at least third woven extent defining a third tubular internal diameter which is different from said first and second tubular internal diameters.
23. The prosthesis of claim 22 wherein said transition from said first tubular internal diameter to said third tubular internal diameter is seamless and gradual.
24. The prosthesis of claim 23 wherein said gradual transition is defined by a change of no more than 3 of said warp yarns for every 2 of said tubular fill yarns.

25. The prosthesis of claim 24 wherein said third woven extent further comprises at least two tubular members forming a bifurcated arch.

26. The prosthesis of claim 25 wherein said bifurcated arch includes warp yarns from said transitional second woven extent gradually interwoven with warp yarns from each of said two tubular members.

27. A method of forming a seamless flat-woven implantable tubular prosthesis comprising the steps of:

weaving a tubular wall having transitional diameter along a longitudinal extent thereof, said weaving including gradually engaging or disengaging warp yarns with fill
5 yarns along said extent to transition from a first diameter to a second diameter different from said first diameter.

28. The method of claim 27 wherein said weaving further includes forming a first elongate portion of uniform diameter contiguous with one end of said longitudinal extent.

29. The method of claim 28 wherein said weaving further includes forming a second elongate portion of uniform diameter contiguous with the other end of said longitudinal extent, said diameter of said first elongate portion being different from said diameter of said second elongate portion.

30. A method of making a seamless flat-woven implantable tubular prosthesis comprising:

weaving a first section of said prosthesis having a first diameter using a first selected number of warp yarns, and

5 seamlessly transitioning to a second section of said prosthesis having a second diameter different from said first diameter by gradually engaging or disengaging warp yarns with fill yarns.

31. The method of claim 30 whereby said transitioning occurs without creating voids between said weave sections greater than the diameter of three warp yarns.

32. A flat-woven implantable tubular prosthesis comprising:

a first substantially fluid-tight tubular woven section having a plurality of warp yarns and fill yarns,

a second substantially fluid-tight tubular woven section having a plurality of warp yarns and fill yarns,

a third substantially fluid-tight tubular woven section having a plurality of warp yarns and fill yarns and

a substantially fluid-tight woven crotch section having warp yarns from said first woven section gradually interwoven with warp yarns from each of said second and third woven sections to seamlessly contiguously join said first woven section to said second and third woven sections at said crotch section.

33. The prosthesis of claim 32, wherein said crotch section includes a gradual change in the number of interlaced warp yarns from said second and said third woven sections.

34. The prosthesis of claim 33, wherein said gradual change in the number of warp yarns is defined by a change of no more than 3 of said warp yarns for every two of said fill yarns.

35. The prosthesis of claim 32, wherein said plurality of warp yarns for said second and said third woven sections define respective second and third tubular internal diameters.

36. The prosthesis of claim 35, wherein said second and said third tubular diameters are different.



37. The prosthesis of claim 35, wherein said second and said third tubular diameters are the same.

38. The prosthesis of claim 32, wherein said warp and fill yarns include materials selected from the group consisting of polyester, polypropylene, polyethylene, polyurethane, polytetrafluoroethylene and combinations thereof.

39. The prosthesis of claim 32, wherein said woven sections include weaving patterns selected from a group consisting of a plain weave, a twill weave, a velour weave and combinations thereof.

40. A method of making a flat-woven implantable tubular prosthesis comprising:

weaving a first substantially fluid-tight tubular woven section by using a plurality of warp yarns and fill yarns,

weaving a second substantially fluid-tight tubular woven section by using a plurality of warp yarns and fill yarns,

weaving a third substantially fluid-tight tubular woven section by using a plurality of warp yarns and fill yarns and

weaving a substantially fluid-tight woven crotch section by gradually interweaving warp yarns from said first woven section with warp yarns from each of said second and third woven sections to seamlessly contiguously join said first woven section to said second and third woven sections at said crotch section.

41. The method of claim 40 further including gradually engaging or disengaging warp yarns with fill yarns to weave said crotch section.

42. The method of claim 41, wherein said gradually engaging or disengaging further includes changing no more than 3 of said warp yarns for every two of said fill yarns.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42



40

43. The method of claim 40, said weaving further includes selecting said warp and fill yarns from materials selected from the group consisting of polyester, polypropylene, polyethylene, polyurethane, polytetrafluoroethylene and combinations thereof.

44. The method of claim 40, wherein said weaving further includes weaving patterns selected from a group consisting of a plain weave, a twill weave, a velour weave and combinations thereof.

DATED this 20th day of November 2000

BOSTON SCIENTIFIC LIMITED

WATERMARK PATENT & TRADEMARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA

P5254AU00 IAS:ALJ:MMC

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181

1/17

FIG-1c PRIOR ART

FIG-1b PRIOR ART

FIG-1a PRIOR ART

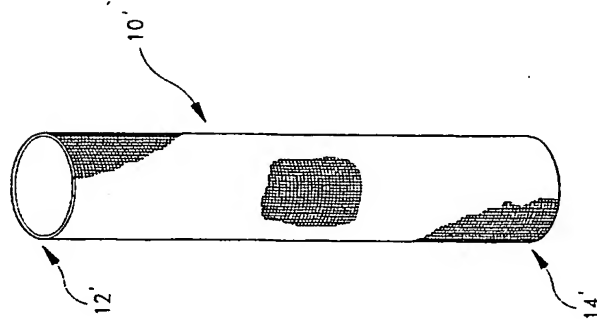
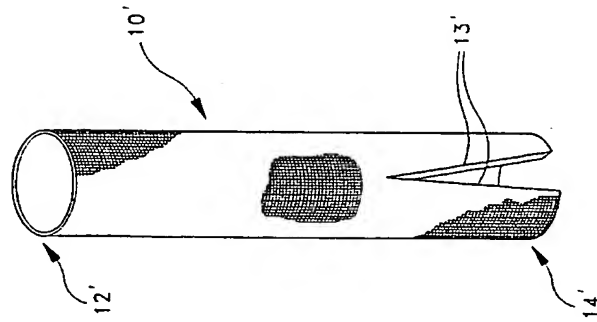
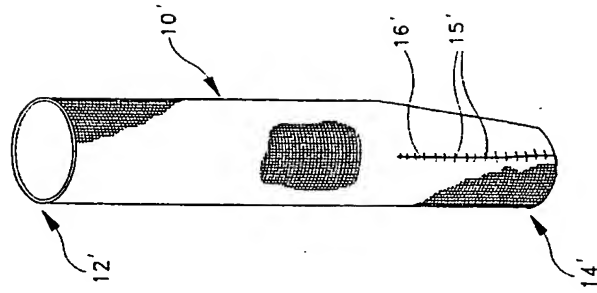


FIG-2

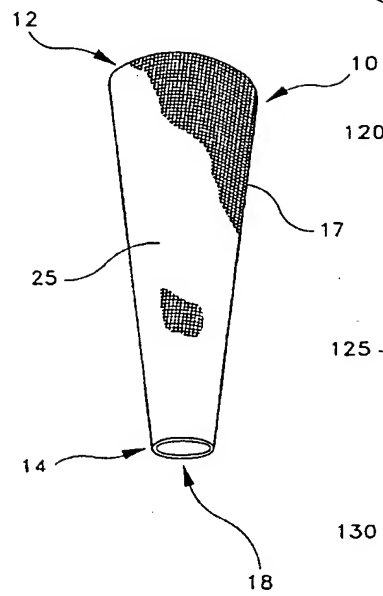
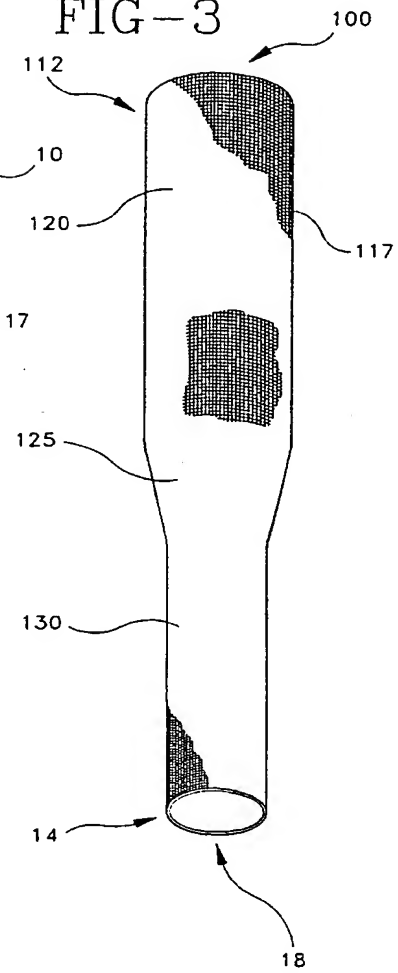


FIG-3



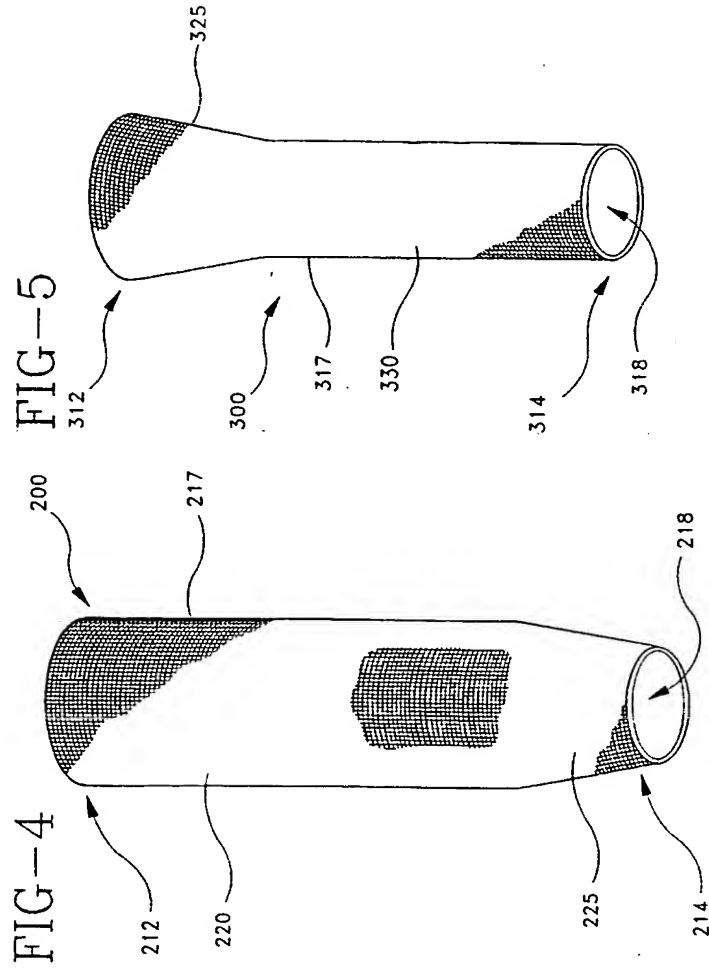


FIG-7

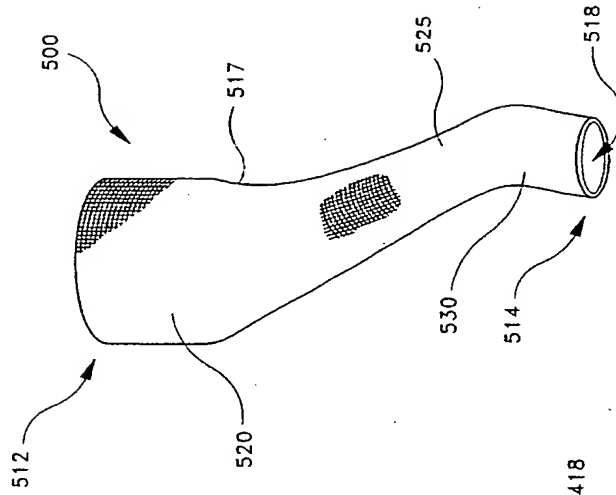
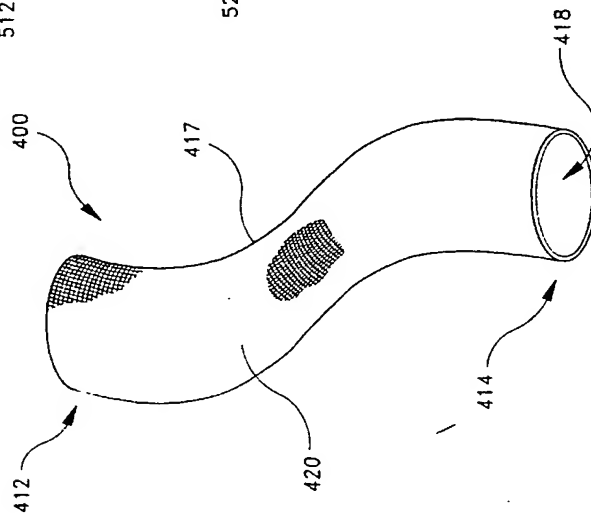
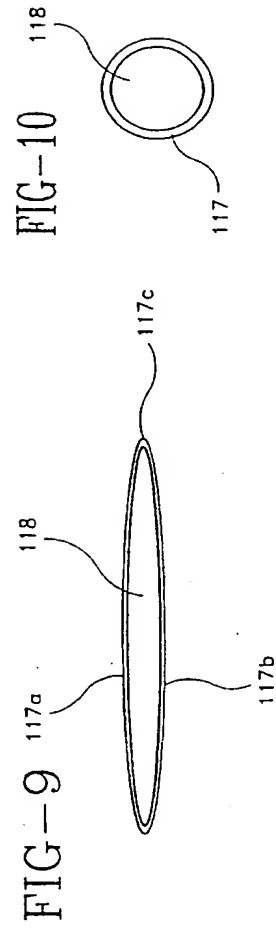
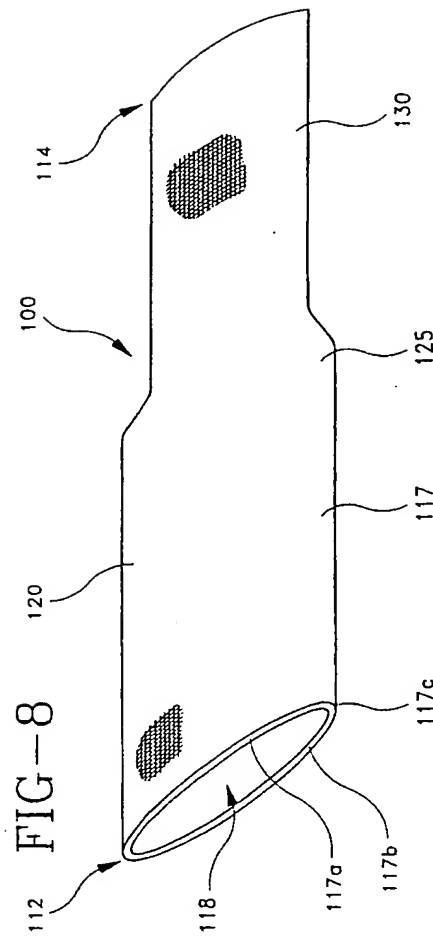
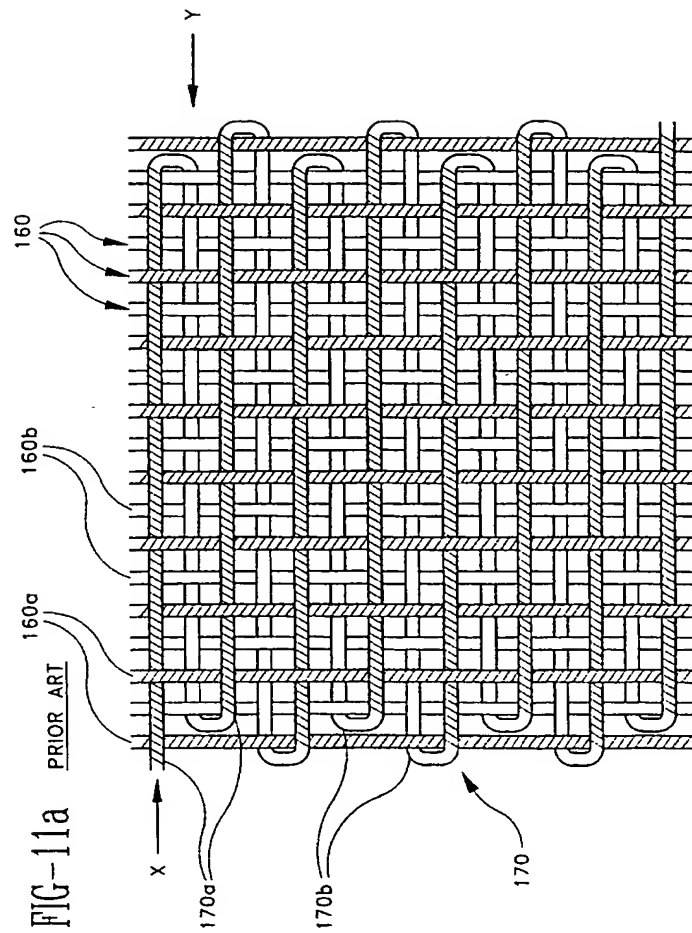


FIG-6








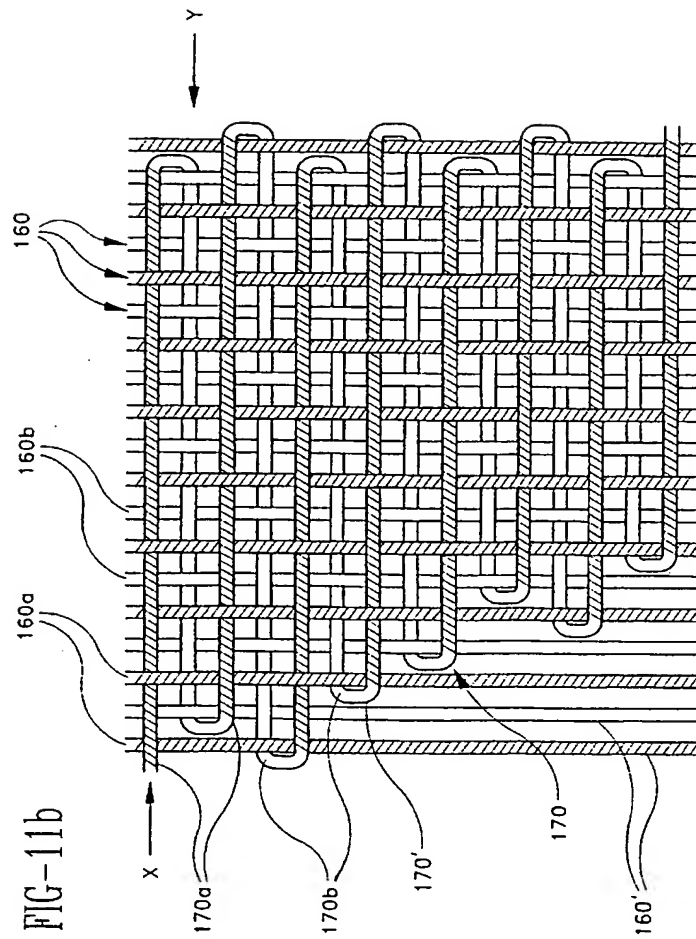


FIG-12

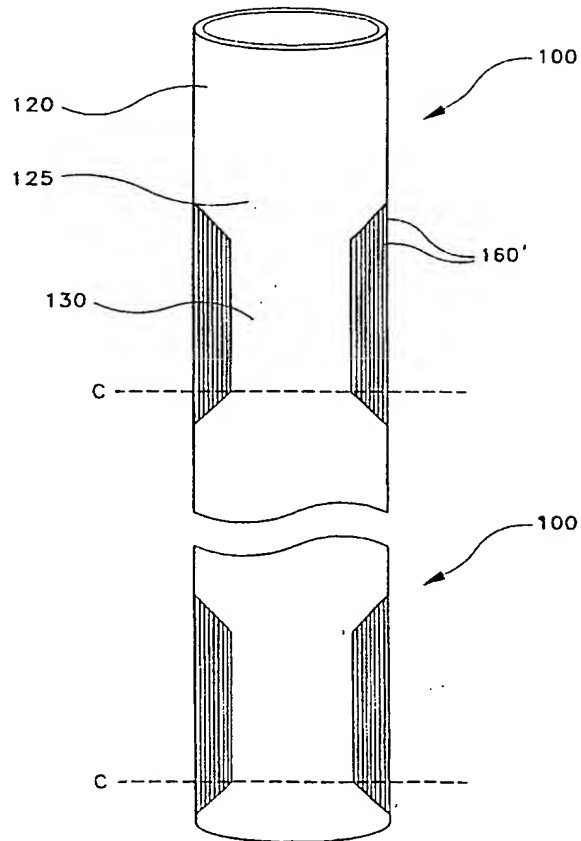


WO 97/43983

PCT/US97/08602

9/17

FIG-13 PRIOR ART

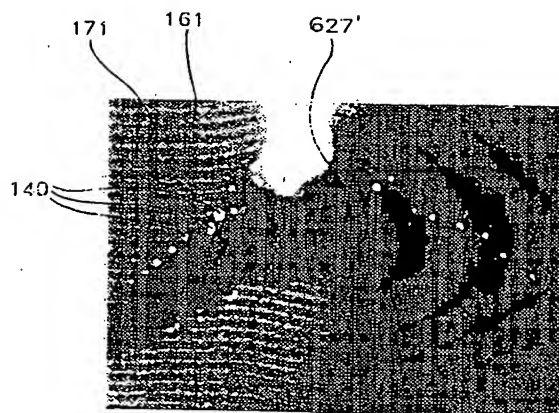

WO 97/43983

PCT/US97/03602

10/17

FIG-14

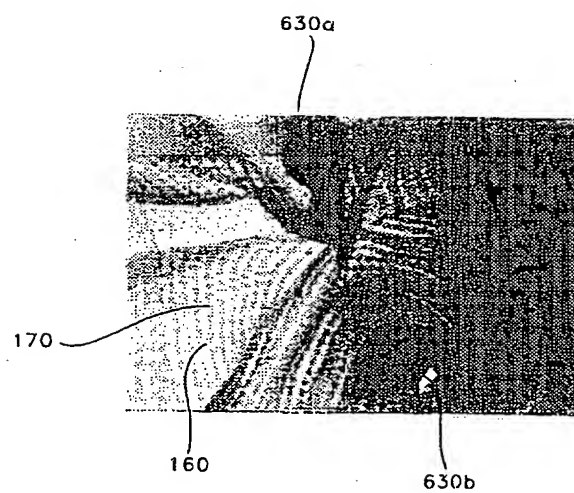


FIG-16

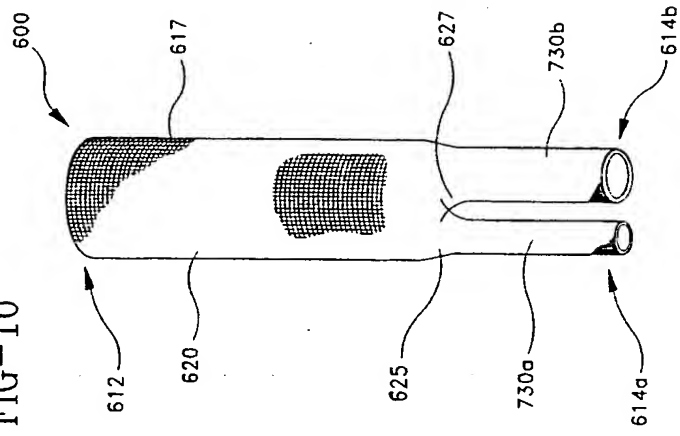


FIG-15

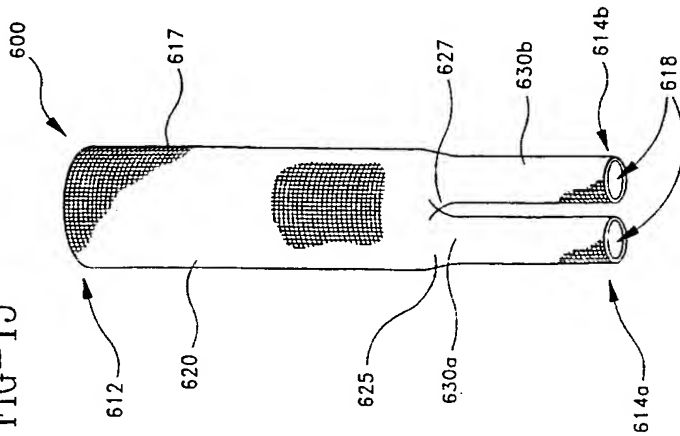


FIG-18


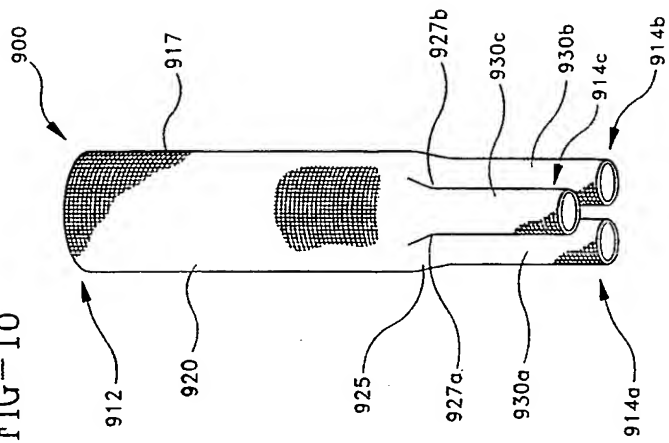


FIG-17

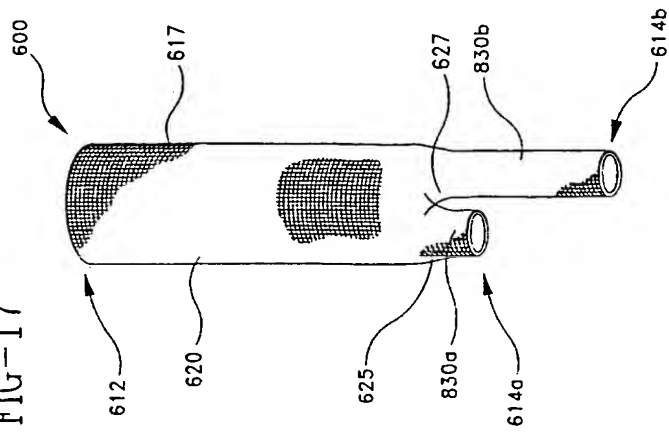


WO 97/43983

PCT/US97/08602

13/17

FIG-19 PRIOR ART

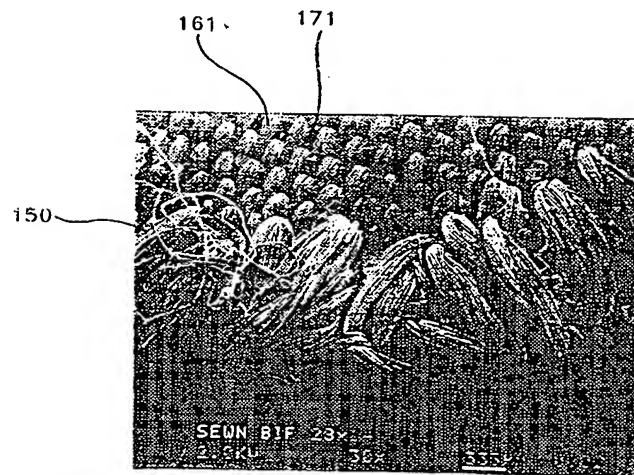

WO 97/43983

PCT/US97/08602

14/17

FIG-20

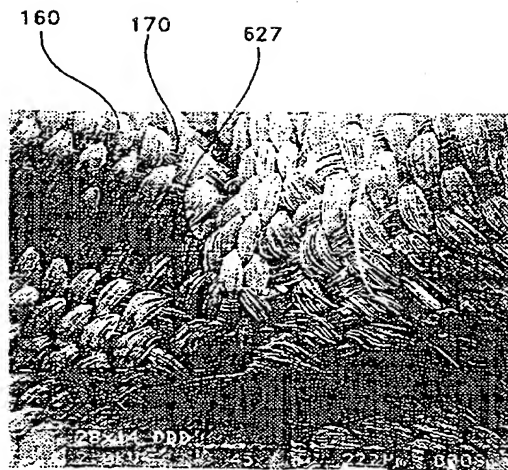


FIG-21

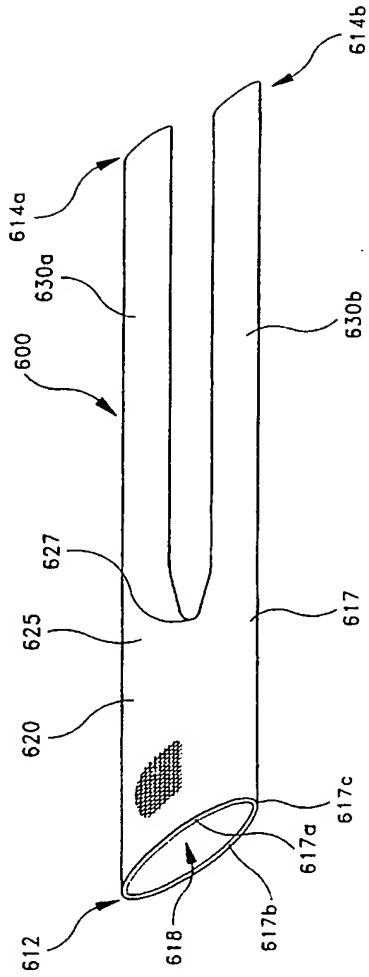


FIG-23




FIG-22

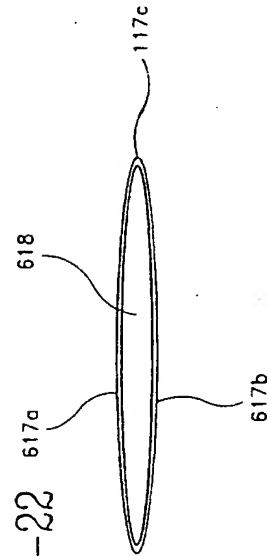


FIG-25

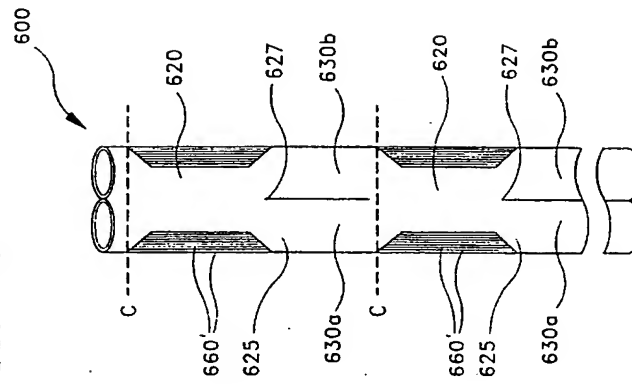


FIG-24

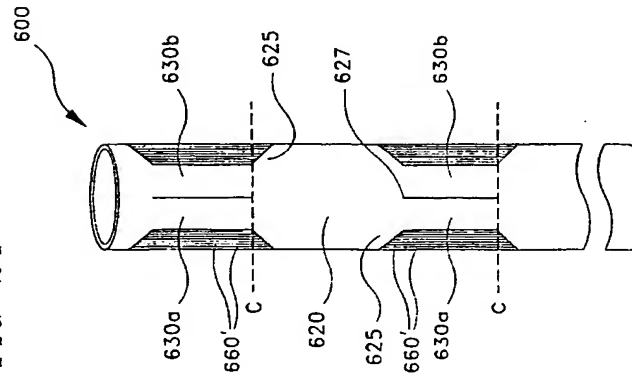


FIG-27


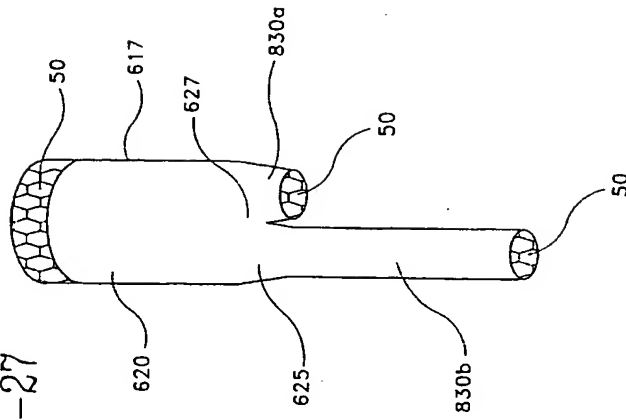


FIG-26

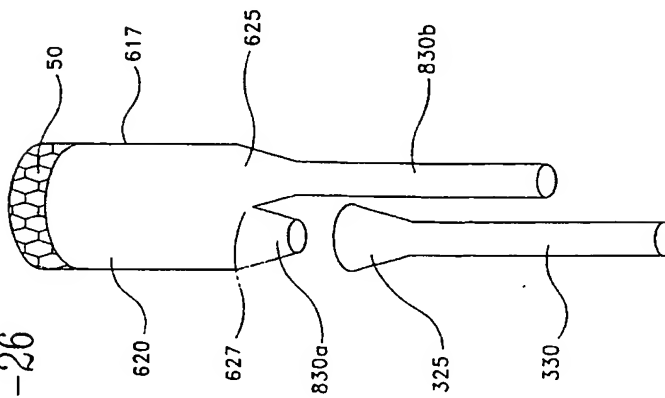

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.